



Electrical & Automation

POWERING A NON-STOP INDIA



**Maximum Retail Prices
For AU**
Effective from 01-10-25

AU

FROM THE COO'S DESK.



Dear Partner,

As the festive season lights up homes and hearts across India, we extend our warmest wishes to you and your loved ones.

This time also marks an important milestone for us at **Lauritz Knudsen Electrical & Automation** - a moment to reflect, renew, and reaffirm our commitment to you.

Your continued trust and partnership have been the cornerstone of our journey. Building on a legacy of over 70 years, and following our refreshed identity last year, we remain focused on delivering **innovative, reliable, and high-quality products** that power progress.

As part of this journey, we are pleased to **share an updated price list**. This revision reflects our ongoing commitment to **transparency, quality, and excellence**, ensuring you continue to receive the best value and service.

This update also coincides with the launch of our **most extensive portfolio yet** - designed to support the evolving technology backbone of the nation.

At Lauritz Knudsen, our philosophy remains simple yet powerful: **We listen. We partner. We innovate.**

These words guide our actions and shape the way we grow - together.

We look forward to continuing our collaboration and powering up homes, industries, farms, infrastructure, businesses, and lives - with you by our side.

Wishing you a joyful festive season and continued success.

A handwritten signature in blue ink, reading "Naresh Kumar". The signature is fluid and cursive, with a horizontal line underneath the name.

Warm regards,
Naresh Kumar
COO & Sr. VP, Electrical Standard Products
Lauritz Knudsen Electrical & Automation

Translating Technology Into Real Benefits

AU Solutions for final distribution offer a unique blend of safety, convenience and performance.
Each product in the AU Solutions range is designed to provide lasting benefits.

Lowest Watt Loss


Saves money and natural resources

MCBs from AU Solutions offer the lowest watt loss in the industry. On an average, the watt loss values are almost 55% lower than those prescribed by IEC.

Lower watt loss means lower power consumption, which directly translates into monetary savings. Beyond tangible benefits, lower power requirement also hints at lower consumption of natural resources used for producing energy. In a nutshell, these MCBs are a small, yet significant step towards sustainability.

Maximum Power Loss Per Pole (W)

Current Ratings (A)	As Per IS/IEC 60898	For AU Range of MCBs	% lower
0.5	3	1.9	38%
1	3	2	33%
1.6	3	2.1	30%
2	3	2.1	30%
3	3	2.1	30%
4	3	2.1	30%
5	3	2.1	30%
6	3	1.1	63%
10	3	1.2	60%
16	3.5	1.8	50%
20	4.5	1.9	58%
25	4.5	2.1	54%
32	6	2.4	60%
40	7.5	3.1	59%
50	9	4.1	54%
63	13	4.3	67%
80	15	3.9	74%
100	15	6.2	59%
125	20	9.2	54%

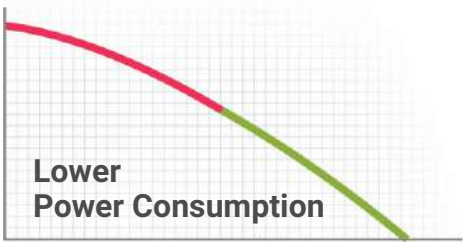

Greater Savings



Towards Sustainability



For reducing
extra gases



For driving
extra miles



For electrifying
extra houses

Note:
[Black colour : HSN code]
Current GST 18%, subject to changes
as per Govt. notification

Short-circuit Fault Indicator in MCBs

Easy diagnosis, saves downtime

With the unique short-circuit fault indication feature, one can conclude if the MCB has tripped due to a short-circuit fault.

It helps in reducing downtime as the faulty phase and cause of MCB tripping are easily detected.

If the MCB has tripped on 'overload', non-critical loads can be switched off before switching the MCB on again.

In the case of a short-circuit fault, the location and cause of the short-circuit should be identified and the necessary corrective action should be taken.

UNIQUE
BENEFIT



UNIQUE
BENEFIT

Earth Leakage Fault Indication in RCCBs

- › Clear indication by yellow coloured flag
- › Easy detection of occurrence of earth leakage

Flexibility

- › **Flexibility in Termination**
 - › Bi-connect terminals offer busbar or cable termination at both incoming and outgoing sides
- › **Line-Load Reversibility**
 - › Either of the sides of an RCCB can be used to terminate supply or load
- › **RCCBs removability with busbar in place**
 - › This feature, with a uniquely designed DIN clip, offers easy removal of DIN mounted RCCBs while the connection busbar is in place with adjoining devices
 - › Offers great flexibility in installation process
 - › Reduces installation time

Communication Capability

For smart systems

With the communication capability of AU Solutions, one can monitor and control various devices remotely.

The complete communication system can be deployed for effective energy management.



RoHS Compliance

Environment-friendly

RoHS compliant AU Solutions do not use any substances which are hazardous to the environment.



MCBs (Miniature Circuit Breakers) [8536]

Range Highlights

- › Conforms to IS/IEC 60898-1, EN 60898-1, IEC 60898-1, EN 60947-2, IEC 60947-2
 - › Wide Range of Current Ratings - 0.5A to 125A
 - › Short circuit Breaking Capacity
 - 10kA (IS/IEC 60898-1, EN 60898-1) - 0.5A to 63A
 - 15kA (IS/IEC 60947-2) - 0.5 to 40A; 10kA (IS/IEC 60947-2) - 50A & 63A
 - 15kA (IS/IEC 60947-2, EN 60947-2) - 80, 100 & 125A
- › B, C & D Characteristics
 - › Available in SP, DP, TP, FP, SPN and TPN
 - › Suitable for DC Application
 - › Suitable for Isolation
 - › Protection Degree - IP 20
 - › Availability of wide Range of Site Mountable Accessories

Standard Version AU-10 | 10kA as per IS/IEC 60898-1

Rating	Modules 1 Mod = 17.5 mm	B Curve CAT Nos.	M.R.P. (₹) Per Unit	C Curve CAT Nos.	M.R.P. (₹) Per Unit	D Curve CAT Nos.	M.R.P. (₹) Per Unit
Single Pole							
0.5A	1	-	-	AU10S10E53C	565	AU10S10E53D	570
1A	1	-	-	AU10S10013C	565	AU10S10013D	570
1.6A	1	-	-	AU10S11E63C	565	AU10S11E63D	570
2A	1	-	-	AU10S10023C	565	AU10S10023D	570
3A	1	-	-	AU10S10033C	565	AU10S10033D	570
4A	1	-	-	AU10S10043C	565	AU10S10043D	570
5A	1	-	-	AU10S10053C	565	AU10S10053D	570
6A	1	AU10S10063B	379	AU10S10063C	379	AU10S10063D	475
10A	1	AU10S10103B	379	AU10S10103C	379	AU10S10103D	475
16A	1	AU10S10163B	379	AU10S10163C	379	AU10S10163D	475
20A	1	AU10S10203B	379	AU10S10203C	379	AU10S10203D	475
25A	1	AU10S10253B	379	AU10S10253C	379	AU10S10253D	475
32A	1	AU10S10323B	379	AU10S10323C	379	AU10S10323D	475
40A	1	AU10S10403B	810	AU10S10403C	810	AU10S10403D	855
50A	1	AU10S10503B	810	AU10S10503C	810	AU10S10503D	855
63A	1	AU10S10633B	810	AU10S10633C	810	AU10S10633D	855
Two Pole							
0.5A	2	-	-	AU10S20E53C	1545	AU10S20E53D	1550
1A	2	-	-	AU10S20013C	1545	AU10S20013D	1550
1.6A	2	-	-	AU10S21E63C	1545	AU10S21E63D	1550
2A	2	-	-	AU10S20023C	1545	AU10S20023D	1550
3A	2	-	-	AU10S20033C	1545	AU10S20033D	1550
4A	2	-	-	AU10S20043C	1545	AU10S20043D	1550
5A	2	-	-	AU10S20053C	1545	AU10S20053D	1550
6A	2	AU10S20063B	1115	AU10S20063C	1115	AU10S20063D	1140
10A	2	AU10S20103B	1115	AU10S20103C	1115	AU10S20103D	1140
16A	2	AU10S20163B	1115	AU10S20163C	1115	AU10S20163D	1140
20A	2	AU10S20203B	1115	AU10S20203C	1115	AU10S20203D	1140
25A	2	AU10S20253B	1115	AU10S20253C	1115	AU10S20253D	1140
32A	2	AU10S20323B	1115	AU10S20323C	1115	AU10S20323D	1140
40A	2	AU10S20403B	1795	AU10S20403C	1795	AU10S20403D	1865
50A	2	AU10S20503B	1795	AU10S20503C	1795	AU10S20503D	1865
63A	2	AU10S20633B	1795	AU10S20633C	1795	AU10S20633D	1865
Three Pole							
0.5A	3	-	-	AU10S30E53C	2295	AU10S30E53D	2320
1A	3	-	-	AU10S30013C	2295	AU10S30013D	2320
1.6A	3	-	-	AU10S31E63C	2295	AU10S31E63D	2320
2A	3	-	-	AU10S30023C	2295	AU10S30023D	2320
3A	3	-	-	AU10S30033C	2295	AU10S30033D	2320
4A	3	-	-	AU10S30043C	2295	AU10S30043D	2320
5A	3	-	-	AU10S30053C	2295	AU10S30053D	2320
6A	3	AU10S30063B	1830	AU10S30063C	1830	AU10S30063D	1855
10A	3	AU10S30103B	1830	AU10S30103C	1830	AU10S30103D	1855
16A	3	AU10S30163B	1830	AU10S30163C	1830	AU10S30163D	1855
20A	3	AU10S30203B	1830	AU10S30203C	1830	AU10S30203D	1855
25A	3	AU10S30253B	1830	AU10S30253C	1830	AU10S30253D	1855
32A	3	AU10S30323B	1830	AU10S30323C	1830	AU10S30323D	1855
40A	3	AU10S30403B	2790	AU10S30403C	2790	AU10S30403D	2870
50A	3	AU10S30503B	2790	AU10S30503C	2790	AU10S30503D	2870
63A	3	AU10S30633B	2790	AU10S30633C	2790	AU10S30633D	2870

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP/SPN - 6 Nos., TP - 4 Nos., FP/TPN - 3 Nos.

Standard Version AU-10 | 10kA as per IS/IEC 60898-1



Rating	Modules 1 Mod = 17.5 mm	B Curve CAT Nos.	M.R.P. (₹) Per Unit	C Curve CAT Nos.	M.R.P. (₹) Per Unit	D Curve CAT Nos.	M.R.P. (₹) Per Unit
Four Pole							
0.5A	4	-	-	AU10S40E53C	2810	AU10S40E53D	2830
1A	4	-	-	AU10S40013C	2810	AU10S40013D	2830
1.6A	4	-	-	AU10S41E63C	2810	AU10S41E63D	2830
2A	4	-	-	AU10S40023C	2810	AU10S40023D	2830
3A	4	-	-	AU10S40033C	2810	AU10S40033D	2830
4A	4	-	-	AU10S40043C	2810	AU10S40043D	2830
5A	4	-	-	AU10S40053C	2810	AU10S40053D	2830
6A	4	AU10S40063B	2425	AU10S40063C	2425	AU10S40063D	2435
10A	4	AU10S40103B	2425	AU10S40103C	2425	AU10S40103D	2435
16A	4	AU10S40163B	2425	AU10S40163C	2425	AU10S40163D	2435
20A	4	AU10S40203B	2425	AU10S40203C	2425	AU10S40203D	2435
25A	4	AU10S40253B	2425	AU10S40253C	2425	AU10S40253D	2435
32A	4	AU10S40323B	2425	AU10S40323C	2425	AU10S40323D	2435
40A	4	AU10S40403B	3465	AU10S40403C	3465	AU10S40403D	3600
50A	4	AU10S40503B	3465	AU10S40503C	3465	AU10S40503D	3600
63A	4	AU10S40633B	3465	AU10S40633C	3465	AU10S40633D	3600
SPN							
0.5A	2	-	-	AU10SS0E53C	1465	-	-
1A	2	-	-	AU10SS0013C	1465	-	-
1.6A	2	-	-	AU10SS1E63C	1465	-	-
2A	2	-	-	AU10SS0023C	1465	-	-
3A	2	-	-	AU10SS0033C	1465	-	-
4A	2	-	-	AU10SS0043C	1465	-	-
5A	2	-	-	AU10SS0053C	1465	-	-
6A	2	-	-	AU10SS0063C	1030	-	-
10A	2	-	-	AU10SS0103C	1030	-	-
16A	2	-	-	AU10SS0163C	1030	-	-
20A	2	-	-	AU10SS0203C	1030	-	-
25A	2	-	-	AU10SS0253C	1030	-	-
32A	2	-	-	AU10SS0323C	1030	-	-
40A	2	-	-	AU10SS0403C	1660	-	-
50A	2	-	-	AU10SS0503C	1660	-	-
63A	2	-	-	AU10SS0633C	1660	-	-
TPN							
0.5A	4	-	-	AU10ST0E53C	2695	-	-
1A	4	-	-	AU10ST0013C	2695	-	-
1.6A	4	-	-	AU10ST1E63C	2695	-	-
2A	4	-	-	AU10ST0023C	2695	-	-
3A	4	-	-	AU10ST0033C	2695	-	-
4A	4	-	-	AU10ST0043C	2695	-	-
5A	4	-	-	AU10ST0053C	2695	-	-
6A	4	-	-	AU10ST0063C	2265	-	-
10A	4	-	-	AU10ST0103C	2265	-	-
16A	4	-	-	AU10ST0163C	2265	-	-
20A	4	-	-	AU10ST0203C	2265	-	-
25A	4	-	-	AU10ST0253C	2265	-	-
32A	4	-	-	AU10ST0323C	2265	-	-
40A	4	-	-	AU10ST0403C	3270	-	-
50A	4	-	-	AU10ST0503C	3270	-	-
63A	4	-	-	AU10ST0633C	3270	-	-

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP/SPN - 6 Nos., TP - 4 Nos., FP/TPN - 3 Nos.

MCBs (Miniature Circuit Breakers) : 80A-125A [8536]

Range Highlights

- › Short circuit Breaking Capacity - 15kA (IS/IEC 60947-2, EN 60947-2)

› C & D Characteristics

› Available in SP, DP, TP and FP
- › Suitable for Isolation

› Protection Degree - IP 20

› Availability of wide Range of Site Mountable Accessories



Rating	Modules 1 Mod = 17.5 mm	C Curve Cat. No.	M.R.P. (₹) Per Unit	D Curve Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)					
80A	1.5	AU15S10803C	2940	AU15S10803D	3345
100A	1.5	AU15S11003C	3295	AU15S11003D	3745
125A	1.5	AU15S11253C	3545	AU15S11253D	4045
Double Pole (DP)					
80A	3	AU15S20803C	6515	AU15S20803D	7415
100A	3	AU15S21003C	6950	AU15S21003D	7905
125A	3	AU15S21253C	7650	AU15S21253D	8695
Three Pole (TP)					
80A	4.5	AU15S30803C	10280	AU15S30803D	11705
100A	4.5	AU15S31003C	10965	AU15S31003D	12460
125A	4.5	AU15S31253C	12165	AU15S31253D	13825
Four Pole (FP)					
80A	6	AU15S40803C	13425	AU15S40803D	15245
100A	6	AU15S41003C	13965	AU15S41003D	15890
125A	6	AU15S41253C	15815	AU15S41253D	17975

CERTIFIED TO LEAD,
TRUSTED FOR SAFETY.



BIS-Certified HR MCBs Range - 80A, 100A & 125A

RCCBs (Residual Current Circuit Breakers) [8536]

Range Highlights*

- › Conforms to IEC 61008-1, EN 61008-1, IS 12640-1
 - › Wide Range of Current Ratings - 16A to 100A
 - › Precise Sensitivities for variety of applications - from 10mA to 500mA
 - › 2P & 4P versions
 - › Suitable for Isolation
- › Protection Degree - IP 20
 - › Availability of wide Range of Site Mountable Accessories
 - › Available in
 - » Type AC : For standard AC installations
 - » Type Adi : Suitable for AC + Pulsating DC (Type A) + Harmonics

Type-AC



Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P AC				
16A	10mA	2	AURAC201601	6750
25A	10mA	2	AURAC202501	7335
	30mA	2	AURAC202503	3790
	100mA	2	AURAC202510	4020
	300mA	2	AURAC202530	4020
	500mA	2	AURAC202550	4900
40A	30mA	2	AURAC204003	4335
	100mA	2	AURAC204010	4675
	300mA	2	AURAC204030	4675
	500mA	2	AURAC204050	5600
63A	30mA	2	AURAC206303	5265
	100mA	2	AURAC206310	5505
	300mA	2	AURAC206330	5505
	500mA	2	AURAC206350	5915
80A	30mA	2	AURAC208003	8590
	100mA	2	AURAC208010	8650
	300mA	2	AURAC208030	8650
100A	30mA	2	AURAC210003	9375
	100mA	2	AURAC210010	9450
	300mA	2	AURAC210030	9450



Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
4P AC				
25A	30mA	4	AURAC402503	5050
	100mA	4	AURAC402510	5360
	300mA	4	AURAC402530	5360
	500mA	4	AURAC402550	6440
40A	30mA	4	AURAC404003	5100
	100mA	4	AURAC404010	5435
	300mA	4	AURAC404030	5435
	500mA	4	AURAC404050	6530
63A	30mA	4	AURAC406303	5855
	100mA	4	AURAC406310	6225
	300mA	4	AURAC406330	6225
	500mA	4	AURAC406350	6670
80A	30mA	4	AURAC408003	9700
	100mA	4	AURAC408010	9780
	300mA	4	AURAC408030	9780
	500mA	4	AURAC408050	10390
100A	30mA	4	AURAC410003	10330
	100mA	4	AURAC410010	10400
	300mA	4	AURAC410030	10400
	500mA	4	AURAC410050	10710

Type-Adi



Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P Adi				
25A	30mA	2	AURAD202503	5815
	100mA	2	AURAD202510	6080
	300mA	2	AURAD202530	6080
40A	30mA	2	AURAD204003	6170
	100mA	2	AURAD204010	6270
	300mA	2	AURAD204030	6270
63A	30mA	2	AURAD206303	7220
	100mA	2	AURAD206310	7355
	300mA	2	AURAD206330	7355
100A	30mA	2	AURAD210003	10665



Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
4P Adi				
25A	30mA	4	AURAD402503	7030
	100mA	4	AURAD402510	7165
	300mA	4	AURAD402530	7165
40A	30mA	4	AURAD404003	7300
	100mA	4	AURAD404010	7415
	300mA	4	AURAD404030	7415
63A	30mA	4	AURAD406303	7950
	100mA	4	AURAD406310	8115
	300mA	4	AURAD406330	8115
100A	30mA	4	AURAD410003	12665
	300mA	4	AURAD410030	12665

*For technical details, please contact nearest branch office

RCBOs (Residual Current Breaker with Overcurrent Protection) [8536]

Range Highlights*

- › Conforms to IEC 61009-1, IS 12640-2, EN 61009-1
- › Short circuit Breaking Capacity - 10kA
- › Precise Sensitivities for a variety of applications
 - » from 10mA to 300mA
- › Suitable for Isolation

Type-AC

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P AC*				
6A	10mA	2	AUF3C200601	5405
	30mA	2	AUF3C200603	5405
	100mA	2	AUF3C200610	5515
	300mA	2	AUF3C200630	5580
10A	10mA	2	AUF3C201001	5405
	30mA	2	AUF3C201003	5405
	100mA	2	AUF3C201010	5515
	300mA	2	AUF3C201030	5580
16A	10mA	2	AUF3C201601	5405
	30mA	2	AUF3C201603	5405
	100mA	2	AUF3C201610	5515
	300mA	2	AUF3C201630	5580
20A	30mA	2	AUF3C202003	5405
	100mA	2	AUF3C202010	5515
	300mA	2	AUF3C202030	5580
25A	30mA	2	AUF3C202503	5405
	100mA	2	AUF3C202510	5515
	300mA	2	AUF3C202530	5580
32A	30mA	2	AUF3C203203	5405
	100mA	2	AUF3C203210	5515
	300mA	2	AUF3C203230	5580
40A	30mA	2	AUF3C204003	5405
	100mA	2	AUF3C204010	5515
	300mA	2	AUF3C204030	5580
63A	30mA	4	AUF3C206303	6415
	100mA	4	AUF3C206310	6805
	300mA	4	AUF3C206330	6860
4P AC				
16A	30mA	7.5	AUF3C401603	5800
	100mA	7.5	AUF3C401610	6460
	300mA	7.5	AUF3C401630	6590
20A	30mA	7.5	AUF3C402003	5800
	100mA	7.5	AUF3C402010	6460
	300mA	7.5	AUF3C402030	6590
25A	30mA	7.5	AUF3C402503	5800
	100mA	7.5	AUF3C402510	6460
	300mA	7.5	AUF3C402530	6590
32A	30mA	7.5	AUF3C403203	5990
	100mA	7.5	AUF3C403210	6465
	300mA	7.5	AUF3C403230	6605
40A	30mA	7.5	AUF3C404003	6085
	100mA	7.5	AUF3C404010	6465
	300mA	7.5	AUF3C404030	6625
63A	30mA	7.5	AUF3C406303	7290
	100mA	7.5	AUF3C406310	7425
	300mA	7.5	AUF3C406330	7425
80A	30mA	12	AUF3C408003	27740
	100mA	12	AUF3C408010	28360
	300mA	12	AUF3C408030	28360
100A	30mA	12	AUF3C410003	29655
	100mA	12	AUF3C410010	30365
	300mA	12	AUF3C410030	30365

#For 2P AC D Curve RCBO, please contact nearest branch office



- › Availability of wide Range of Site Mountable Accessories
- › Available in
 - » Type AC: For standard AC installations
 - » Type Adi: Suitable for AC + Pulsating DC (Type A) + Harmonics

Type-Adi

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P Adi				
6A	30mA	2	AUF3D200603	7160
	100mA	2	AUF3D200610	7885
	300mA	2	AUF3D200630	8180
10A	30mA	2	AUF3D201003	7160
	100mA	2	AUF3D201010	7885
	300mA	2	AUF3D201030	8180
16A	30mA	2	AUF3D201603	7160
	100mA	2	AUF3D201610	7885
	300mA	2	AUF3D201630	8180
20A	30mA	2	AUF3D202003	7160
	100mA	2	AUF3D202010	7885
	300mA	2	AUF3D202030	8180
25A	30mA	2	AUF3D202503	7160
	100mA	2	AUF3D202510	7885
	300mA	2	AUF3D202530	8180
32A	30mA	2	AUF3D203203	7160
	100mA	2	AUF3D203210	7885
	300mA	2	AUF3D203230	8180
40A	30mA	2	AUF3D204003	7160
	100mA	2	AUF3D204010	7885
	300mA	2	AUF3D204030	8180
63A	30mA	4	AUF3D206303	8280
	100mA	4	AUF3D206310	8760
	300mA	4	AUF3D206330	8835
4P Adi				
16A	30mA	7.5	AUF3D401603	7480
	100mA	7.5	AUF3D401610	8320
	300mA	7.5	AUF3D401630	8490
20A	30mA	7.5	AUF3D402003	7480
	100mA	7.5	AUF3D402010	8320
	300mA	7.5	AUF3D402030	8490
25A	30mA	7.5	AUF3D402503	7480
	100mA	7.5	AUF3D402510	8320
	300mA	7.5	AUF3D402530	8490
32A	30mA	7.5	AUF3D403203	7720
	100mA	7.5	AUF3D403210	8325
	300mA	7.5	AUF3D403230	8500
40A	30mA	7.5	AUF3D404003	7835
	100mA	7.5	AUF3D404010	8325
	300mA	7.5	AUF3D404030	8535
63A	30mA	7.5	AUF3D406303	9390
	100mA	7.5	AUF3D406310	9580
	300mA	7.5	AUF3D406330	9580
80A	30mA	12	AUF3D408003	27740
	100mA	12	AUF3D408010	28360
	300mA	12	AUF3D408030	28360
100A	30mA	12	AUF3D410003	29655
	100mA	12	AUF3D410010	30365
	300mA	12	AUF3D410030	30365

*For technical details, please contact nearest branch office

Indicating Lights [8531]



Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
RED	1	AUIL01RED00	1160
YELLOW	1	AUIL01YEL00	1160
BLUE	1	AUIL01BLU00	1160
GREEN	1	AUIL01GRE00	1160
RED-YELLOW-BLUE	1	AUIL01RYB00	1410

SPDs (Surge Protection Devices) [8536]



- Range Highlights**
- › Conforms to IEC 61643-11
 - › Available in Type 2 and Type 1+2
 - › Type 2 : Protection against indirect lightning and switching surges
 - » Maximum Discharge Current - I_{max} up to 70kA
 - › Type 1+2 : Protection against direct and indirect lightning surges
 - » Maximum Discharge Current - I_{max} up to 100kA

800V Solar Application

Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage (Uc)	Cat. No.	M.R.P. (₹) Per Unit
Type 2, I _{max} 40kA	3P	4	1500	AUSP023P40-1500	12500
Type 1+2, I _{imp} 12.5kA	3P	5	1360	AUSP123P50-1360	41430
Type 1+2, I _{imp} 12.5kA	3P	4	880	AUSP123P50-880	30000



440V Application (Common + Differential Mode)

Description	I _{max}	Configuration	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Type 1+2, I _{imp} 12.5kA	50kA	1P+N	2	AUSP121PN50D	11070
		3P+N	4	AUSP123PN50D	21205
Type 2	40kA	1P+N	1	AUSP021PN40D	6920
		3P+N	2	AUSP023PN40D	13830
Type 2	15kA	1P+N	1	AUSP021PN15D	5535
		3P+N	2	AUSP023PN15D	10890
Type 1+2, I _{imp} 8kA	100kA	1P+N	2	AUSP121PN100D	9955
		3P+N	4	AUSP123PN100D	19555
Type 2	70kA	1P+N	2	AUSP021PN70D	10870
		3P+N	4	AUSP023PN70D	18100

SPD Cartridges

Description	Cat. No.	M.R.P. (₹) Per Unit
Cartridge for AUSP021PN15D	AUSC021PN15D	2720
Cartridge for AUSP021PN40D	AUSC021PN40D	3390
Cartridge for AUSP021PN70D / AUSP023PN70D	AUSC021PN70D	3625
Cartridge for AUSP023PN15D [#]	AUSC023PN15D	3560
Cartridge for AUSP023PN40D [#]	AUSC023PN40D	4525
Cartridge for AUSP121PN100D / AUSP123PN100D	AUSC121PN100D	5430
Cartridge for AUSP121PN50D / AUSP123PN50D	AUSC121PN50D	5860
Cartridge for AUSP023PN15D [#]	AUSC023PN15DG	4125
Cartridge for AUSP023PN40D [#]	AUSC023PN40DG	4305

[#]For technical details, please contact nearest branch office

Accessories [8538]

All Half Module and One Module Accessories are common for 80A-125A MCBs, RCBOs and Adi RCCBs



Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage	CAT Nos.	M.R.P. (₹) Per Unit
Auxiliary Contact	1NO+1NC	0.5	240V AC, 24V DC	AUAXAC240	1055
AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	AUATAC240	1240
HR AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	AUATAC240HR	1240
Undervoltage	-	1	240V AC	AUUVAC240	2500
Release	-	1	24V DC	AUUVDC024	2500
Overvoltage Release	-	1	240V AC	AUOVAC240	3090
Shunt Release	-	1	240V AC	AUSRAC240	2865
	-	1	24V DC	AUSRDC024	2865
Padlock-Suitable for Lock Hasp 3.5 - 5 mm dia. max	Suitable for 1Pole=1Mod devices: RCCBs, RCBOs, Changeover Switches up to 40A			AUPD01	565
	Suitable for 1Pole-1.5Mod devices: MCBs 80A-125A, Changeover Switch 63A			AUPD02	640

Note: Standard Pack Quantity for Padlock - 2 Nos.
*For 80A-125A MCBs please contact nearest branch office

Energy Meters [9030]



- Range Highlights**
- › DIN mounting whole current operated meter
 - › Accuracy Class 1.0
 - › Inbuilt RS485 option
 - › Parameters : Voltage, Current, kW, kWh, kVA, kVAh, RPM, Load hours, Interruptions

Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Single Phase - 60A	2	WD4010100000	3100
Three Phase - 80A	5	WD4020100000	6715
Single Phase - 60A (RS485)	2	WD4010110000	4585
Three Phase - 80A (RS485)	5	WD4020110000	10130

Isolators [8536]

Range Highlights

- › Suitable for Isolation as per IEC 60947-3, IS/IEC 60947-3
 - » Providing operational safety at the downstream
- › Comprehensive range suitable for various applications
- › Utilization Category of AC-22A
- › Suitability for Mounting Auxiliary Contact



Rating	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
Double Pole			
25A	2	AUI00202500	550
32A	2	AUI00203200	610
40A	2	AUI00204000	660
63A	2	AUI00206300	870
80A	2	AUI00208000	1060
100A	2	AUI00210000	1180
125A	2	AUI00212500	1345
Three Pole			
32A	3	AUI00303200	1065
40A	3	AUI00304000	1145
63A	3	AUI00306300	1345
80A	3	AUI00308000	1475
100A	3	AUI00310000	1540
125A	3	AUI00312500	1740
Four Pole			
32A	4	AUI00403200	1180
40A	4	AUI00404000	1460
63A	4	AUI00406300	1605
80A	4	AUI00408000	1770
100A	4	AUI00410000	1960
125A	4	AUI00412500	2155

Changeover Switches [8536]

Range Highlights

- › Conforms to IEC 60947-3 and IS/IEC 60947-3
- › Available in 3 positions (I-O-II) with centre off position
- › Utilization category AC-22A



Rating	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Double Pole			
25A	2	AUC00202500	1795
40A	2	AUC00204000	2745
63A	3	AUC00206300	3195
Four Pole			
40A	4	AUC00404000	4730
63A	6	AUC00406300	5365

Modular Contactors [8536]



Range Highlights

- › Wide Range of Current Ratings:
 - » 25A, 40A and 63A
- › Conforms to:
 - » IEC 61095, EN 61095
 - » IEC 60947-4-1, EN 60947-4-1
 - » IEC 60947-5-1
- › Protection Degree IP 20

Description (AC-1)	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
25A-1NO	1	AUMC1002501	2015
25A-2NO	1	AUMC2002501	2525
40A-2NO	3	AUMC2004003	4320
40A-3NO	3	AUMC3004003	6190
40A-4NO	3	AUMC4004003	7260
63A-2NO+2NC	3	AUMC2206303	7675
63A-3NO	3	AUMC3006303	7865
63A-4NO	3	AUMC4006303	8660
Accessory [8538]			
Auxiliary Contact, 2NO	0.5	AUMCAUX240	1880

Single Phase - ACCL [8536]

Automatic Changeover with Current Limiter



Range Highlights

- › Conforms to IEC 60947-6, IEC 60947-3
- › Wide Range of Current Ratings
 - » (Generator side) - 1A to 30A
 - » (Electricity Board side) - 30A
- › RoHS compliant

Description EB/DG	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
30A/1A	4	AUCL01030001	2505
30A/1.5A	4	AUCL010301E5	2505
30A/2A	4	AUCL01030002	2505
30A/2.5A	4	AUCL010302E5	2505
30A/3A	4	AUCL01030003	2505
30A/4A	4	AUCL01030004	2505
30A/5A	4	AUCL01030005	2505
30A/6A	4	AUCL01030006	2505
30A/8A	4	AUCL01030008	2505
30A/10A	4	AUCL01030010	2505
30A/12A	4	AUCL01030012	2505
30A/15A	4	AUCL01030015	2505
30A/20A	4	AUCL01030020	2505
30A/30A	4	AUCL01030030*	2505

*Non-current limiting variant

Three Phase - ACCL [8536]

Automatic Changeover with Current Limiter



Range Highlights

- › Settable overload current limit at DG side
- › Separate power consumption monitoring for Mains & Genset
- › Settable overvoltage & undervoltage protection
- › Settable TPN or SPN mode at DG side
- › Protection against single phasing

Description (AC-1) EB/DG	Cat. No.	M.R.P. (₹) Per Unit
32A / 32A	AUCL03032032	12295
40A / 32A	AUCL03040032	12670
40A / 40A	AUCL03040040	13715
50A / 50A	AUCL03050050	19545
63A / 50A	AUCL03063050	21570
63A / 63A	AUCL03063063	24430
80A / 80A	AUCL03080080	37235
125A / 125A	AUCL03125125	62680

For 3 Phase ACCL programming video
please scan the QR code or click here



AU-COM: Communication Solution [8538]

Range Highlights

- › Can be deployed for AU range of MCBs, RCCBs, RCBs & energy meters
- › Capable of local and remote status monitoring of final distribution products- ON, OFF and TRIP
- › With AU-COM and modular contactors AU-MC, remote controlling of the load can be achieved
- › The convertor module converts RS 485 data signals from AU-COM into SCADA-compatible ethernet signals
- › For remote monitoring and metering of energy, single-phase and three-phase energy meters with RS 485 converters module can be Used



Description	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
AU-COM communication module	1.5	AUCOM0402	*
AU-CON convertor module	1.5	AUCON0403	*

*Please contact nearest branch office for details.

General Terms

All prices are on Maximum retail price basis inclusive of all duties, GST & any other tax as applicable.

Warranty Policy

All products listed in the price list are covered by a warranty against manufacturing defects for a period of 18* months from the date of purchase. For Lauritz Knudsen MCBs & Isolators mounted inside Lauritz Knudsen Distribution Boards, an extended warranty of 5 years is provided.

In the event of a defect due to faulty workmanship or other associated reasons, we will, at our discretion, remedy the defect or replace the faulty parts or the entire product as soon as possible, free of cost.

However, the warranty is subject to proper usage, efficient maintenance, and does not cover defects arising from fire, accidents, inefficient maintenance, faulty operation, or deliberate or accidental damage. It also does not cover damage to power electronic components such as thyristors & IGBTs, which primarily fail due to overtemperature & over-voltage. Users need to take adequate precautions to eliminate these conditions. Manufacturer shall not be responsible & liable for any special, incidental, social or consequential (including lost profits) loss, consequential damages, injury or damages (punitive) of any kind solely attributable to defect or failure of its products. Manufacturer shall not be liable in any manner for the issue of or failure in the performance of other equipment the product is attached to.

Comprehensive Service Support

Lauritz Knudsen Electrical & Automation has over seven decades of experience in providing after sales service for low voltage distribution system in every type of industry & commercial complex in India

Lauritz Knudsen Electrical & Automation offers the following services, partnering you in your maintenance of low voltage distribution products:

- › Regular Maintenance
- › Preventive Maintenance Programme
- › On Call
- › Annual Maintenance Contract
- › Product Support for Managing Obsolescence-

Switchgear Training Centres



Pune

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
T-156 / 157, MIDC,
Bhosari, Pune - 411 026
Tel: 020-2712 0037 / 2712 0653
E-mail: STC-PUNE@LK-EA.com



Lucknow

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
C-6 & 7, UPSIDC,
P. O. Sarojininagar,
Lucknow - 226 008
Tel: 97944 54455
E-mail: STC-LUCKNOW@LK-EA.com



Delhi

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
A-25, Imperia Complex, First Floor
Mohan Cooperative Industrial Estate
Near Sarita Vihar / Mohan Estate Metro Station
Main Mathura Road, New Delhi - 110044
Tel: 9899020306 / 9720186726 / 9560845094
E-mail: STC-DELHI@LK-EA.com



Kolkata

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre,
2nd Floor, Block BN3, Sector V,
Salt Lake City,
Kolkata - 700091, West Bengal
Tel: 7738717893 / 7797795567
E-mail: STC-KOLKATA@LK-EA.com



Vadodara

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Behind L&T Knowledge City,
Near Village Ankhol,
Vadodara - 390019
Tel: 0265 6147805 / 6147808
E-mail: STC-VADODARA@LK-EA.com



Coonor

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Ooty-Coonoor Main Road
Yellanahalli P.O.,
The Nilgiris - 643 243
Tel: 0423 251 7107
E-mail: STC-COONOOR@LK-EA.com

Notes:

Electrical Standard Products (ESP) Offices

HEAD OFFICE

Lauritz Knudsen Electrical & Automation, A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra.
Tel: 022-6722 6300 | Fax: 022-6705 1112 | e-mail: CIC@LK-EA.com

BRANCH OFFICES

Lauritz Knudsen Electrical & Automation
C-201, The First Commercial Complex,
B/S Keshavbaug Party Plot, Vastrapur,
Ahmedabad - 380 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Shri Daneshwari, 1st Floor,
Plot No. 17, 2nd Cross, Near Old Income
Tax Office Road, Vidyanagar,
Hubballi - 580 021
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
No.10, Fortuna Towers, 2nd Floor,
Rana Pratap Marg, Near NBRI,
Lucknow - 226 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A06/A07, Second Floor,
Grand Chandra Complex, Frazer Road
Patna - 800 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Wework Central, #36 Infantry Road,
Bengaluru - 560 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
AWFIS Space Solutions, Prestige Phoenix,
4th floor, 1405, Umanagar, Begumpet,
Hyderabad - 500 016
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
El Dorado Building, 3rd Floor, 6,
Venkatraman Street, Chinna Chokkikulam,
Madurai - 625 002
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
UrbanWrk, 5th Floor, Sai Radhe,
Raja Bahadur Mill Road, Behind Hotel
Grand Sheraton, Sangamwadi
Pune - 411 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Work loop Unit-612, 6th Floor,
Esplanade One, Rasulgarh,
Bhubaneswar - 751 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Workie, 214 - 2nd Floor,
Apollo Premier, PU-4,
Scheme No. 54, Vijay Nagar Square,
Indore - 452 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Bestech Business Park,
Tower - A, 2nd floor, Sector - 66
Mohali - 160059
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 211 & 212, Pithalia Plaza,
KK Road, Near Fafadih Chowk,
Raipur - 492 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
801 Word Level-8, No. 28,
SIDCO Industrial Estate, Guindy,
Chennai - 600 032
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 430, 4th Floor,
Jaipur Electronic Market, Riddhi Siddhi,
Gopalpura Bypass,
Jaipur - 302 018
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
TC II, Tower B, PRIMA BAY Gate No. 5,
Saki Vihar Road Powai,
Mumbai - 400 072
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
DevX 4th Floor, A Wing, Om 9 Square,
150 Ft Ring Road, Near Nana Mava Circle,
Opp Silver Heights,
Rajkot - 360 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Playworkz Coworking Space
43 & 44, 3rd Cross,
Bharathy Colony, Peelamedu,
Coimbatore - 641 004
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
GDR Siddha, Ground Floor, N Road
Bistupur, Opposite St. Mary's Church,
Jamshedpur - 831 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Unnati Building, 2nd Floor,
Automation Campus, A-600, TTC Industrial
Area Shil-Mahape Road, Mahape,
Navi Mumbai - 400 710
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
10th Floor, Titaanium Business,
Bhimrad Road, Althan
Surat - 395 017
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
3rd Floor, 1&2 Vijay Park,
Main Chakrata Road, Opp. Anandam,
Near Ballupur chowk,
Dehradun - 248 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Business Communication Centre
2nd Floor, Chiramel Chambers,
Kurisupally Road, Ravipuram,
Kochi - 682 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
M1 & M2, Mezzanine Floor,
Himalaya Excellency,
Plot No. C-47, Pratap Nagar Square,
Nagpur - 440 022
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
11th Floor, Block-D, Notus IT Park,
Sarabhai Campus, Bhailal Amin Marg,
Vadodara - 390 023
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Ground Floor, B-27,
Biplab Rashbihari Sarani,
Sector 2A, Bidhan Nagar,
Durgapur - 713 212
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz & Knudsen Electrical & Automation
207, 2nd floor, Revolution Complex,
Station Road, E Ward,
Next to Pedestrian Bridge,
Kolhapur - 416 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, Samarth House,
Opposite Titan World,
Samarth Nagar, Mahatma Nagar,
Nasik - 422 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Qubexpro Business Centre,
4th Floor, V Mall, Above Lifestyles,
Facor Layout, Waltair Uplands,
Visakhapatnam - 530 003
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
6th Floor, Exotica Greens, A Block, 191,
R G Baruah Road, Guwahati Central,
Guwahati - 781 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, BN3, Salt Lake, Sector-V,
Kolkata - 700 091
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A-25, 1st Floor, Imperia Complex,
Mohan Corporative Industrial Estate,
Near Sarita Vihar Metro Station,
Mathura Road,
New Delhi - 110 044
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Product improvement is a continuous process. For the latest information and special application, please contact any of our offices listed here. Product photographs shown for representative purpose only.



Lauritz Knudsen Electrical & Automation, Electrical Standard Product
A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra, Phone No: 022-6722 6300 | Web: www.LK-EA.com

Customer Interaction Center (CIC)
Phone no: 022-6932 7800
Web: www.LK-EA.com | e-mail: CIC@LK-EA.com